


# XS WHEEL SAND WASHER

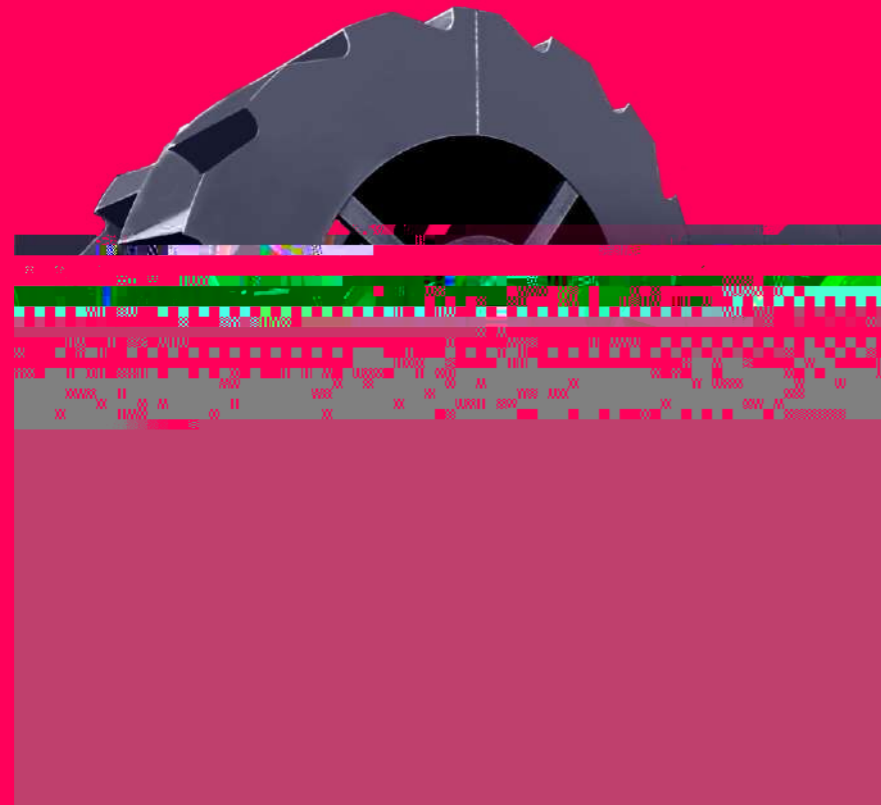

## 设备简介

Introduction

XS

In the sand making process, the XS sand washing machine is used for washing the dirt and dust in the sand to achieve the purpose of cleaning the sand, and can also be used for sanding in the operation of beneficiation or the like or a similar process. It has the characteristics of high washing degree, reasonable structure, large output and less sand loss during sand washing. In the production process, the transmission part is separated from water and sand, and the failure rate is much lower than that of the spiral sand washing machine. It is the domestic sand washing industry. The best choice for upgrading.

## 产品特点

Features

1. The bucket type sand washer has a simple structure, and the impeller drive bearing device is isolated from the water and the water-receiving material, thereby avoiding the occurrence of bearing damage caused by water immersion, sand and pollutants.
2. Sand washing machine (sand washing machine) has obvious advantages compared with the traditional spiral sand washing machine when it is used for sand washing in sand gravel field:
  - a. The loss of fine sand and stone powder is very small, and the sand grading and fineness modulus of the washed building reaches the national "construction sand" and "pebble and gravel for construction" scale.
  - b. The wheel-type sand washing machine has almost no wearing part except the screen.
  - c. Long service life and no maintenance for a long time.
3. The sand washing machine has the advantages of simple structure, convenient maintenance, large processing capacity, small power consumption and high washing degree. The novel sealing structure, fully-sealed oil bath transmission and adjustable overflow slab ensure the high efficiency, durability, cleaning and dewatering effect of the series, and the fine-grained products remain uncluttered.

## 产品参数

Main Specification

Type	Cylinder diameter	Feed size	Processing capacity t/h	Motor power kW	Shape size mm/mm/mm
	mm	mm			
XS2615	2600×1500	10	30-80	7.5	3320×2200×2670
XS3016	3000×1600	10	80-160	18.5	4500×3206×3480
XS3500	3500×1000	10	120-600	11	4420×2930×3800

Note: Specifications and models are subject to change without notice.